



# Electrolux

## Digital Undercounter Benefit-Line Refrigerated Counter 2 Doors - AISI 304

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

Benefit-Line Refrigerated Counter 2 Doors - AISI 304  
Digital Undercounter



Digital Undercounter

Benefit-Line Refrigerated Counter 2 Doors - AISI 304

726139 (RCSN2M2)

2-door refrigerated counter, -2/+10°C, AISI 304

### Short Form Specification

#### Item No.

Internal and external doors, front and side panels and removable worktop (50mm thick) in 304 AISI stainless steel. External back panel in galvanized steel. Reversible self-closing doors in positions less than 90°, a stop at 95° and maximum opening at 180° with a door seal guaranteeing a perfect closure. Height adjustable legs from -10/+60 in 304 AISI stainless steel. Insulation guaranteed by cyclopentane insulating foam (50mm thick). Digital control panel. Operating temperature -2/+10°C. Automatic defrosting and evaporation of defrosted water using a hot gas. Built-in refrigeration unit to operate in ambient temperatures up to +43°C. Ventilated. R404a gas in refrigeration circuit. CFC and HCFC free. Supplied with n.2 Rilsan coated grids 1/1GN.

### Main Features

- Suitable for use in ambient temperatures of up to 43 °C.
- Complies with main international certification bodies and is CE marked.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to +10 °C to suit different food storage requirements.
- Kit 1/2 drawers available as accessory.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.
- This appliance is intended for use in ambient temperatures up to 40°C.

### Construction

- External back panel in galvanized steel.
- Refrigerant type: R404a.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Insulation guaranteed by high density expanded cyclopentane 50 mm in thickness.
- Internal and external doors, front and side panels and 50mm thick removable worktop in 304 AISI stainless steel.
- Built-in compressor to suit operating conditions.
- CFC and HCFC free.

### Included Accessories

- 2 of 1/1GN grey rilsan grid PNC 881435

### Optional Accessories

- 2 half drawers kit for Benefit line counters PNC 880023
- Lock kit for Benefit line counters PNC 880024
- Wheels kit PNC 880025
- Reversibility door kit PNC 880046
- Internal structure to support 3 grids (right and left) PNC 880047
- Kit 2 stainless steel grids GN1/1 for refrigerated counters PNC 880139
- Stainless steel internal structure to support 6 grids (right and left) PNC 880140
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- KIT 4 FEET FOR SB&CONCEPT COUNTER PNC 880334

APPROVAL: \_\_\_\_\_



**Electrolux**

**Digital Undercounter  
Benefit-Line Refrigerated Counter 2  
Doors - AISI 304**


- Kit reversible door for standard benefit counters PNC 880341
- 1/1GN plastic container h=65mm PNC 881038
- 1/1GN plastic container h=150mm PNC 881040
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457



**Digital Undercounter  
Benefit-Line Refrigerated Counter 2 Doors - AISI 304**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2016.07.19

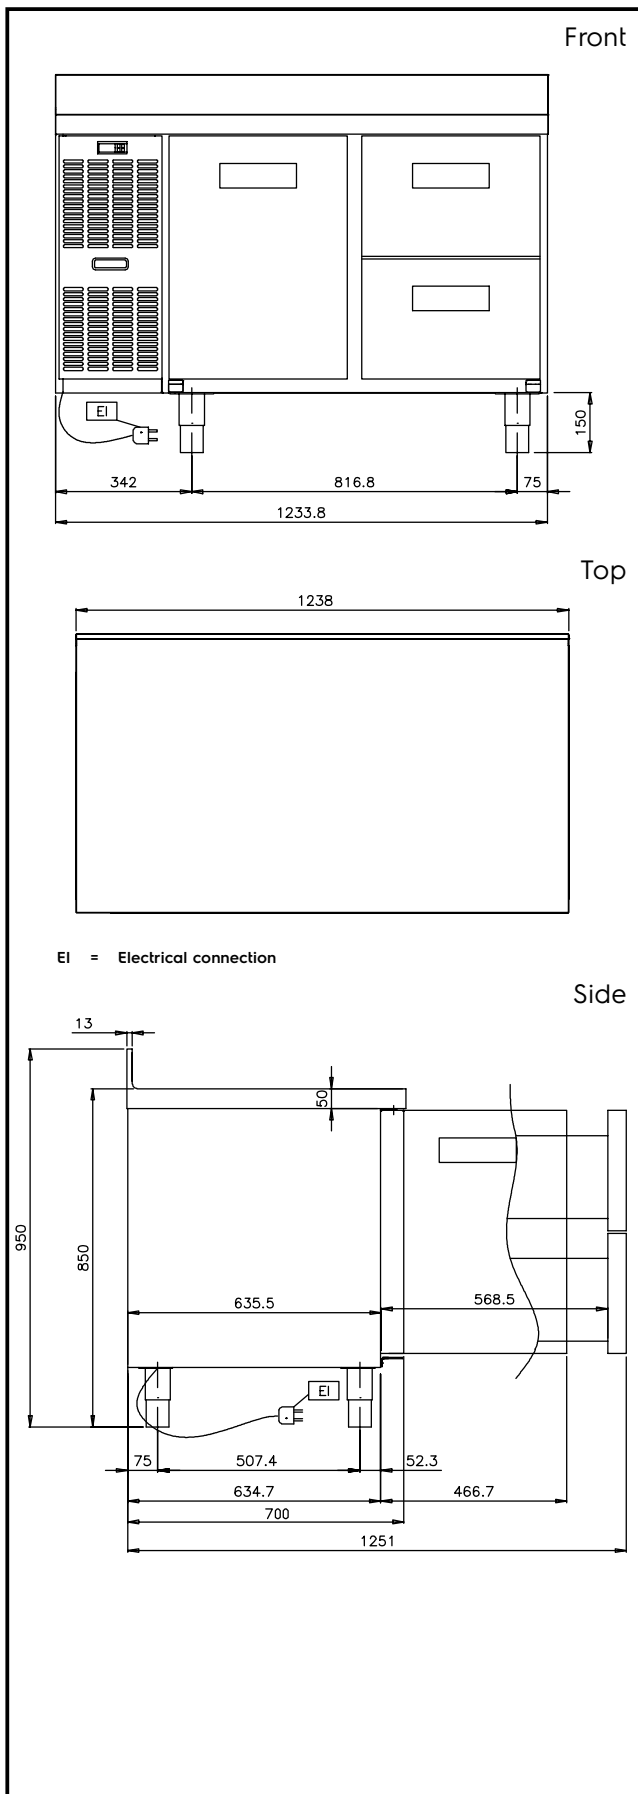

## Electric

Supply voltage:	726139 (RCSN2M2)	230 V/1N ph/50 Hz
Electrical power:		0.267 kW

## Key Information:

Gross capacity:	265 lt
Net Volume:	165 lt
Door hinges:	1 Left+1 Right
External dimensions, Height:	850 mm
External dimensions, Width:	1238 mm
External dimensions, Depth with Doors Open:	1102 mm
Net weight:	119 kg
Noise level:	58.5 dBA
Number and type of grids (included):	2 - GN 1/1
Worktop type:	Stainless Steel

## Built-in Compressor and Refrigeration Unit

## Refrigeration Data

Control type:	Digital
Compressor power:	1/3 hp
Refrigerant type:	R404a
Refrigeration power:	448 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	130 g
Min/Max internal humidity:	55/
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
N° defrost in 24 hrs:	every 6 hrs

## Product Information (EU Regulation 2015/1094)

Energy Class:	C
Yearly energy consumption:	803kWh/year
Climate class:	Heavy Duty (5)
Energy Efficiency Index (EEI):	36,30