



Electrolux

Digital Cabinets 400lt Line Freezer 1 Door - Stainless steel

ITEM # _____

MODEL # _____

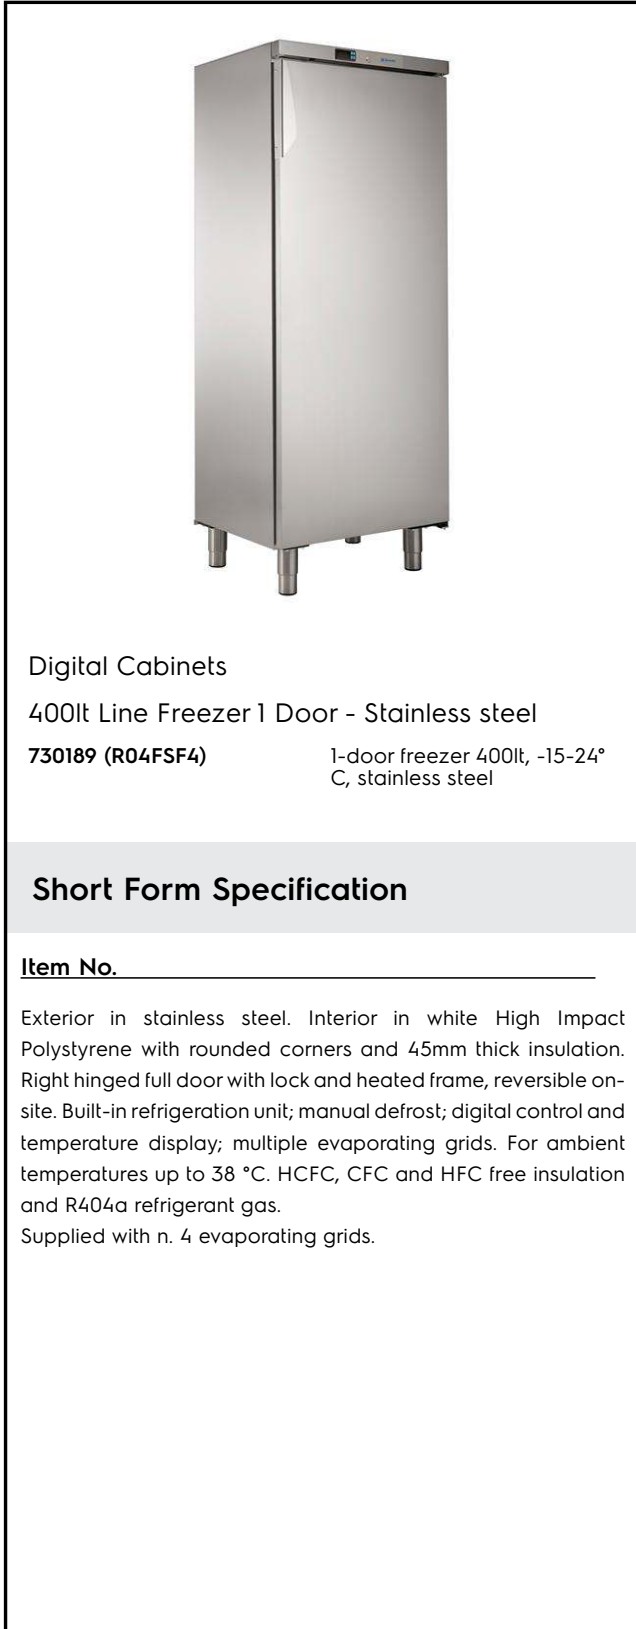
NAME # _____

SIS # _____

AIA # _____



Electrolux



Digital Cabinets

400lt Line Freezer 1 Door - Stainless steel

730189 (R04FSF4)

1-door freezer 400lt, -15-24°
C, stainless steel

Short Form Specification

Item No. _____

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38 °C. HCFC, CFC and HFC free insulation and R404a refrigerant gas.

Supplied with n. 4 evaporating grids.

Main Features

- CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 °C.

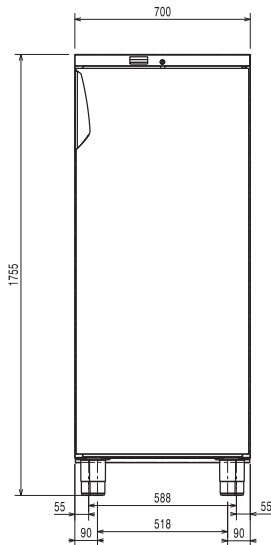

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.

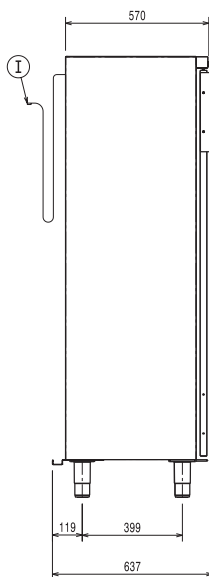
Optional Accessories

- 2 wheels for HD refrigerated counterPNC 880539 and 400, 600 & 1300lt benefit refrigerated cabinets
- Pvc container with false bottom for 400lt PNC 881072
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457

APPROVAL: _____

Front

Top


EI = Electrical connection
 RI = Refrigerant Inlet
 RO = Refrigerant Outlet

Side

Electric

Supply voltage:
 730189 (R04FSF4) 230 V/1N ph/50 Hz
Electrical power: 0.53 kW

Key Information:

Gross capacity: 400 lt
Net Volume:
Door hinges: Right Side
External dimensions, Height: 1755 mm
External dimensions, Width: 700 mm
External dimensions, Depth with Doors Open: 1310 mm
Noise level: 56 dBA
Number and type of grids (included): - 600x400
Type of external material: Stainless Steel
External door material: Stainless Steel

Refrigeration Data

Control type: Digital
Compressor power: 1/2 hp
Refrigerant type: R404a
Refrigeration power: 780 W
Refrigeration power at evaporation temperature: -29 °C
Refrigerant weight: 240 g
Operating temperature min.: -24 °C
Operating temperature max.: -15 °C
Operating mode: Static
Cooling unit: Built-In
Defrost type: Manual