



# Electrolux

## Digital Cabinets 400lt Line Refrigerator 1 Glass Door - Stainless steel

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



Electrolux

400lt Line Refrigerator 1 Glass Door - Stainless steel  
Digital Cabinets



Digital Cabinets

400lt Line Refrigerator 1 Glass Door - Stainless steel

730190 (R04PVG4)

1-glass door refrigerator  
400lt, 0+10°C, stainless steel,  
ventilated

### Short Form Specification

#### Item No.

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged glass door with lock, reversible on-site. Built-in refrigeration unit; ventilated operating mode; automatic defrost and evaporation of defrost water; digital control and temperature display; internal lighting. For ambient temperatures up to 32 °C. HCFC, CFC and HFC free insulation and R134a refrigerant gas.

Supplied with n. 4 grids mm600x400, PE coated.

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Fan assisted cooling for even temperature distribution.
- Model equipped with roll-bond plate that has a plate installed in the internal backside of the unit equipped with a special thermostat to avoid ice formation.
- Suitable for use in ambient temperatures of up to 32 °C.

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

### Included Accessories

- 2 of Pair of grids for 400lt refrigerator, white PNC 880292

### Optional Accessories

- Pair of grids for 400lt refrigerator, white PNC 880292
- Pvc container with false bottom for 400lt PNC 881072
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457


APPROVAL: \_\_\_\_\_




# Electrolux

## Digital Cabinets 400lt Line Refrigerator 1 Glass Door - Stainless steel

Front

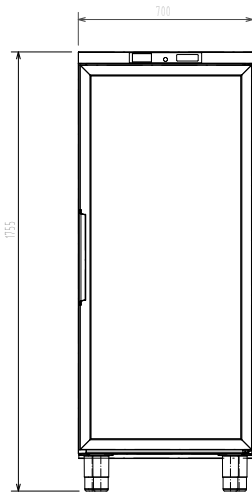


Top

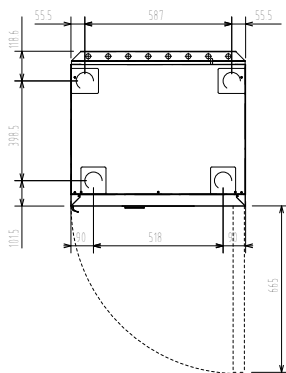

- EI = Electrical connection
- RI = Refrigerant Inlet
- RO = Refrigerant Outlet

Side

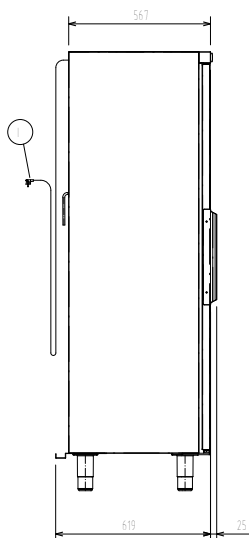

### Electric

Supply voltage:	
730190 (R04PVG4)	230 V/1N ph/50 Hz
Electrical power:	0.19 kW

### Key Information:

Gross capacity:	400 lt
Net Volume:	265 lt
Door hinges:	Right Side
External dimensions, Height:	1755 mm
External dimensions, Width:	700 mm
External dimensions, Depth with Doors Open:	1310 mm
Noise level:	55 dBA
Number and type of grids (included):	4 - 600x400
Type of external material:	Stainless Steel
External door material:	Glass
Internal Light	X

### Refrigeration Data

Control type:	Digital
Compressor power:	1/5 hp
Refrigerant type:	R134a
Refrigeration power:	249 W
Refrigeration power at evaporation temperature:	-12 °C
Refrigerant weight:	240 g
Min/Max internal humidity:	70%/85%
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
Cooling unit:	Built-In
Defrost type:	Automatic (air)

### Product Information (EU Regulation 2015/1094)

Energy Class:	g
Yearly energy consumption:	1160kWh/year
Climate class:	Light Duty (cl.3)
Energy Efficiency Index (EEI):	111,69



Digital Cabinets  
400lt Line Refrigerator 1 Glass Door - Stainless steel

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2016.07.28