



Electrolux

Digital Cabinets 400lt Line Refrigerator 1 Door (-2/+8) - Stainless Steel

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

400lt Line Refrigerator 1 Door (-2/+8) - Stainless Steel
Digital Cabinets



Digital Cabinets

400lt Line Refrigerator 1 Door (-2/+8) - Stainless Steel

730182 (R04NVF4)

1-door refrigerator
400lt, -2+8°C, A430,
ventilated

Short Form Specification

Item No. _____

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock, reversible on-site. Built-in refrigeration unit; ventilated operating mode; automatic defrost by heating elements and automatic evaporation of defrost water; digital control and temperature display. For ambient temperatures up to 43 °C. HCFC, CFC and HFC free insulation and R134a refrigerant gas.

Supplied with n. 4 grids mm600x400, PE coated.

Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Suitable for use in ambient temperatures of up to 43 °C.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Fan assisted cooling for even temperature distribution.

Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

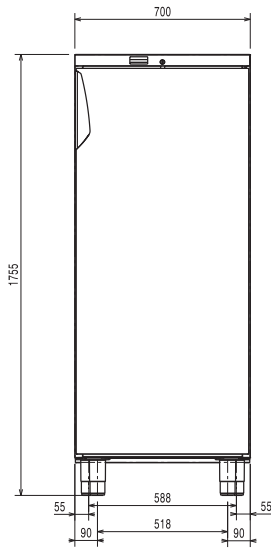

Included Accessories

- 2 of Pair of grids for 400lt refrigerator, white PNC 880292

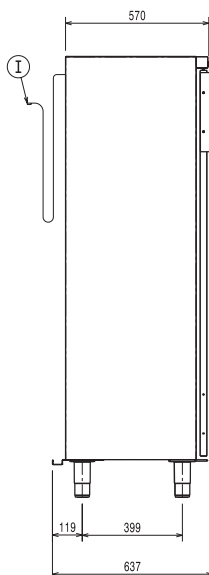
Optional Accessories

- Pair of grids for 400lt refrigerator, white PNC 880292
- 2 wheels for HD refrigerated counter and 400, 600 & 1300lt benefit refrigerated cabinets PNC 880539
- Pvc container with false bottom for 400lt PNC 881072
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457

APPROVAL: _____

Front

Top


EI = Electrical connection
 RI = Refrigerant Inlet
 RO = Refrigerant Outlet

Side

Electric

Supply voltage:
 730182 (R04NVF4) 230 V/1N ph/50 Hz
Electrical power: 0.38 kW

Key Information:

Gross capacity: 400 lt
Net Volume:
Door hinges: Right Side
External dimensions, Height: 1755 mm
External dimensions, Width: 700 mm
External dimensions, Depth with Doors Open: 1310 mm
Noise level: 58 dBA
Number and type of grids (included): 4 - 600x400
Type of external material: Stainless Steel
External door material: Stainless Steel

Refrigeration Data

Control type: Digital
Compressor power: 1/3 hp
Refrigerant type: R134a
Refrigeration power: 398 W
Refrigeration power at evaporation temperature: -10 °C
Refrigerant weight: 200 g
Min/Max internal humidity: 70%/85%
Operating temperature min.: -2 °C
Operating temperature max.: 8 °C
Operating mode: Ventilated
Cooling unit: Built-In
Defrost type: Automatic (electrical)